

SX·SXA Dirt pump



Features

- “Vortex” construction.
- The Oil bath mechanical seal guarantees reliable sealing and long service.
- The Auto thermal motor protector is built-in.

Uses

- Civil engineering & construction
- Industrial uses
- Building facility
- Plant


Special Specifications

Please specify voltage for each pump on your order.
Please contact us for custom specifications.

Standard Specifications

Pumping Fluid	Type of Fluid	Natural water, Filty water, Sewage
	Fluid Temperature	0-40°C (Without freezing)
Structure	Impeller	Vortex
	Shaft Seal	Mechanical Seal
	Bearing	Ball bearing
Material	Casing	Plastic
	Impeller	Plastic
	Shaft	SUS420J1
Motor	Type	Original motor
	Power	1 Phase 100V
	Pole	2 Pole

Performance Curve

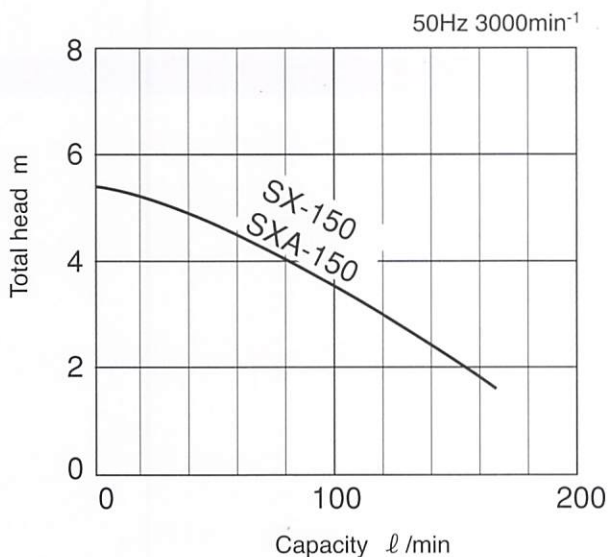


Specifications

Bore mm	Model	50Hz 3000min ⁻¹			
		Capacity l/min	Total head m	Output W	Weight kg
40	SX-150	100	3.5	150	4.5
	SXA-150	100	3.5	150	4.8

Size

SX-150

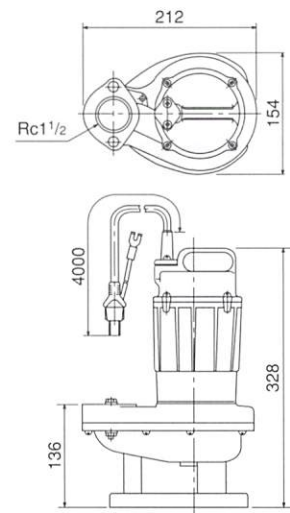

SXA-150

