


予想性能曲線

PERFORMANCE CURVES

テラダマグネットポンプ
 TERADA MAGNET DRIVE PUMP
 型式/MODEL TM-653P/F

No. TMP-261611-000
 モーター/Motor 2.2kW
 周波数/Freq. 60Hz
 適用比重/S.G. =<1.1

吐出量 FLOW	全揚程 TOTAL HEAD	水馬力 WATER POWER	ポンプ効率 PUMP EFF.	軸動力 SHAFT POWER	NPSHr
L/min	m	kW	%	kW	m
40	19.0	0.124	13.8	0.90	1.0
150	19.2	0.469	37.9	1.24	1.4
350	17.0	0.970	57.0	1.70	2.0
500	14.0	1.141	58.5	1.95	2.9
600	11.5	1.125	54.9	2.05	3.2

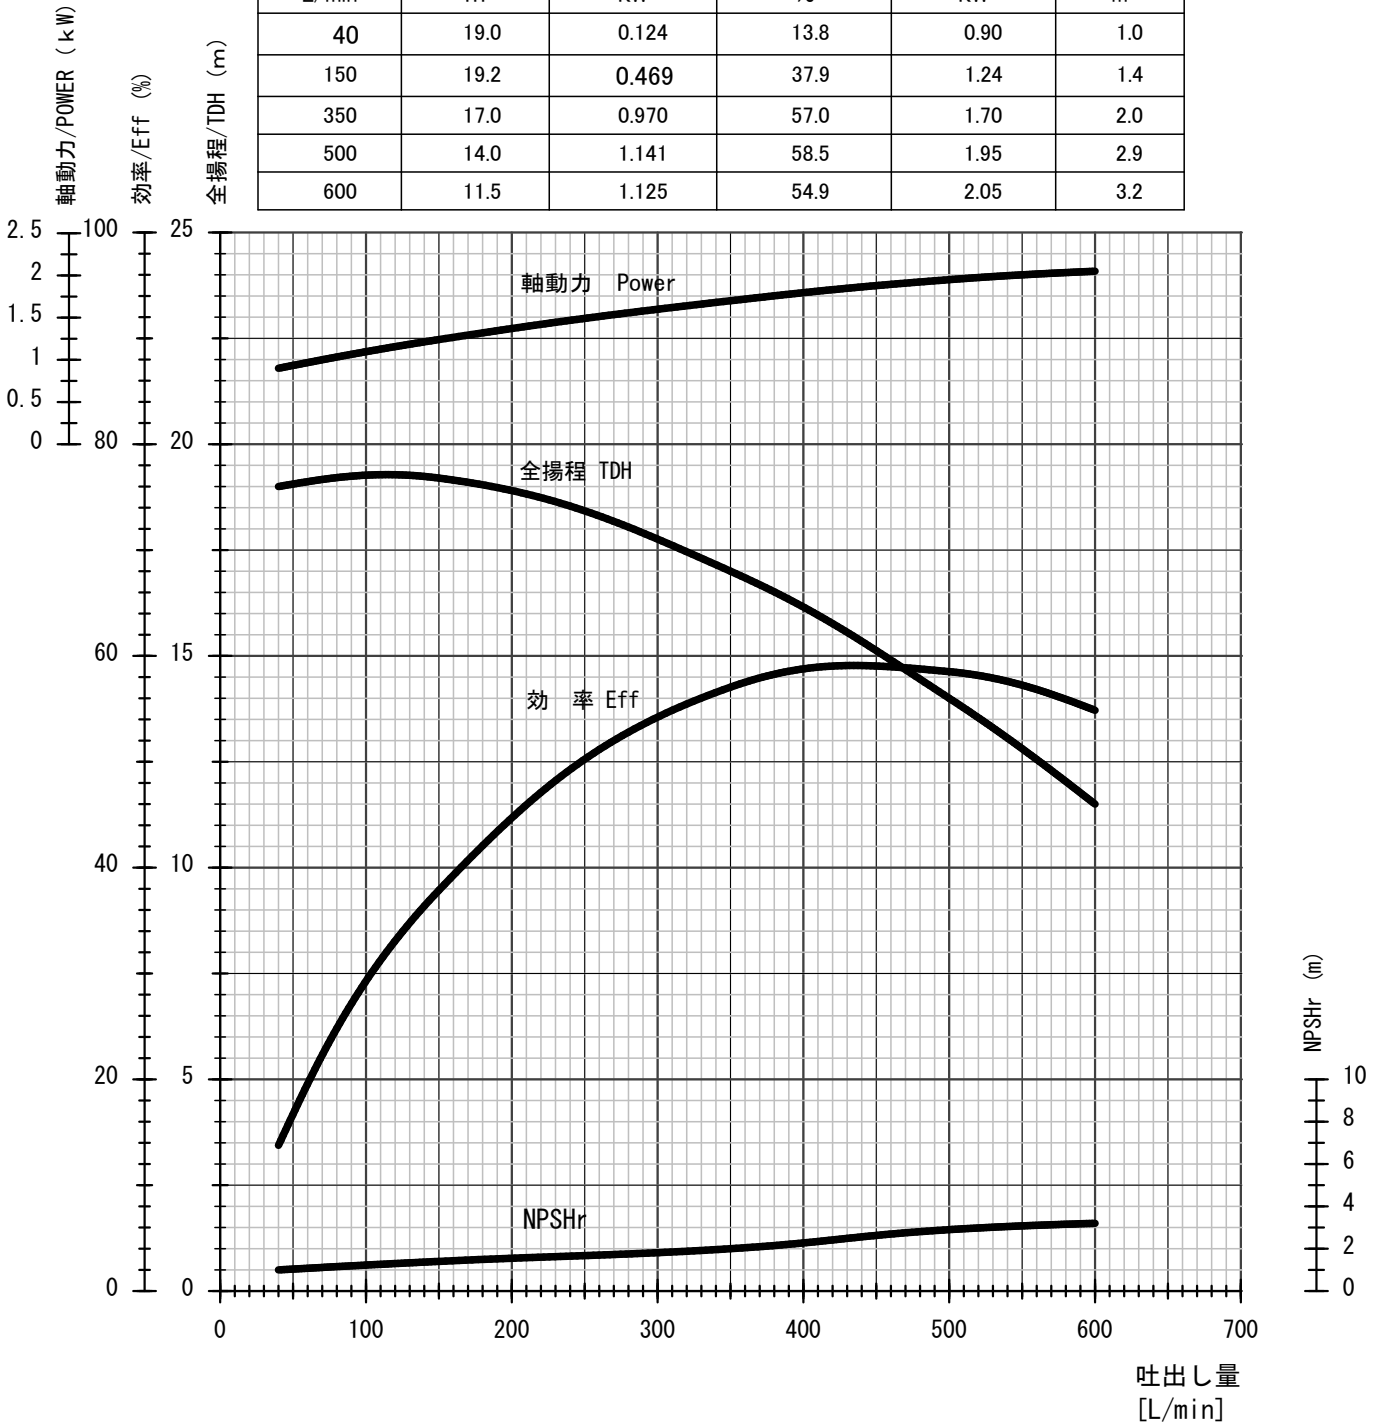


予想性能曲線

PERFORMANCE CURVES

テラダマグネットポンプ
 TERADA MAGNET DRIVE PUMP
 型式/MODEL TM-653P/F

No. TMP-261613-000
 モーター/Motor 2.2kW
 周波数/Freq. 60Hz
 適用比重/S.G. =<1.3

吐出量 FLOW	全揚程 TOTAL HEAD	水馬力 WATER POWER	ポンプ効率 PUMP EFF.	軸動力 SHAFT POWER	NPSHr
L/min	m	kW	%	kW	m
40	16.0	0.104	14.9	0.70	1.0
150	16.2	0.396	37.7	1.05	1.4
350	14.5	0.827	59.1	1.40	2.0
500	11.0	0.896	54.3	1.65	2.9
550	9.0	0.807	47.5	1.70	3.0

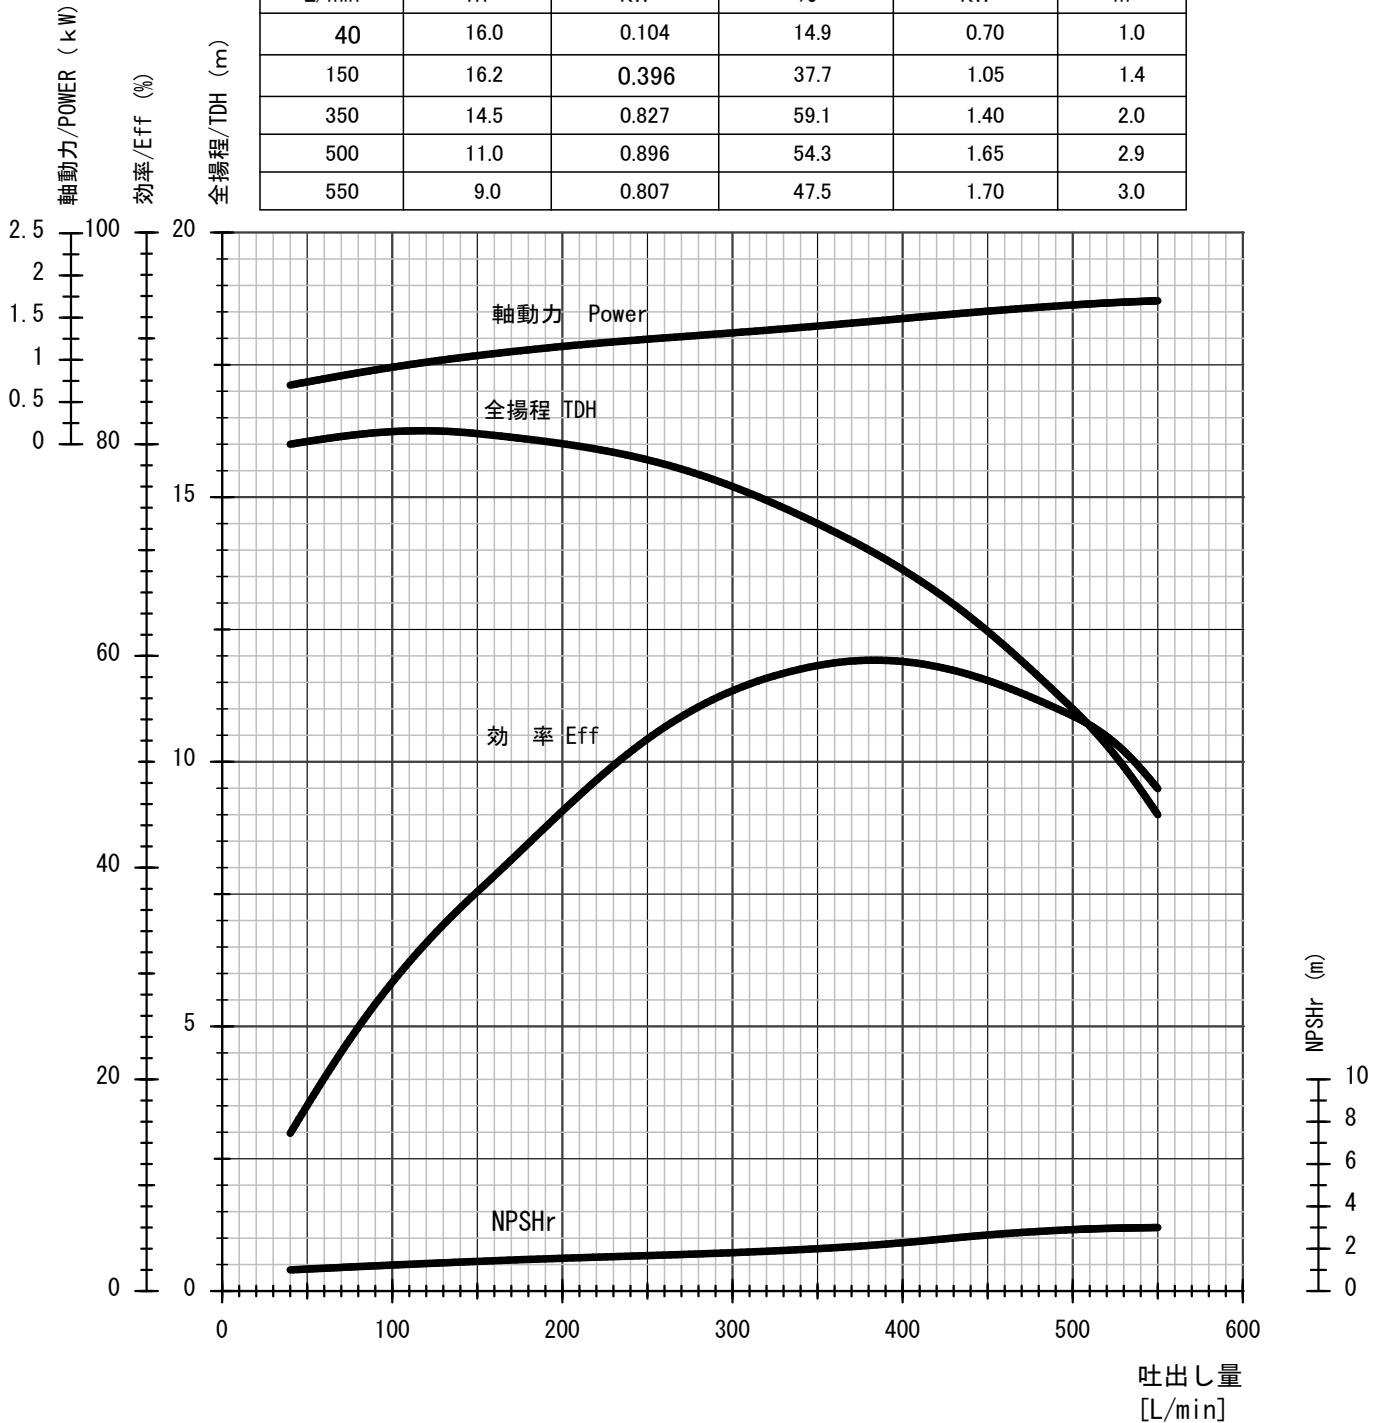

予想性能曲線

PERFORMANCE CURVES

テラダマグネットポンプ
 TERADA MAGNET DRIVE PUMP
 型式/MODEL TM-653P/F

No. TMP-261615-000
 モーター/Motor 2.2kW
 周波数/Freq. 60Hz
 適用比重/S.G. <1.5

吐出量 FLOW	全揚程 TOTAL HEAD	水馬力 WATER POWER	ポンプ効率 PUMP EFF.	軸動力 SHAFT POWER	NPSHr
L/min	m	kW	%	kW	m
40	12.7	0.083	12.2	0.68	1.0
150	13.0	0.318	31.5	1.01	1.4
300	12.0	0.587	45.1	1.30	2.0
400	10.5	0.685	48.6	1.41	2.5
550	6.0	0.538	36.6	1.47	3.0

