


# 予想性能曲線

## PERFORMANCE CURVES

テラダマグネットポンプ  
 TERADA MAGNET DRIVE PUMP  
 型式/MODEL TM-653P/F

No. TMP-261511-000  
 モーター/Motor 2.2kW  
 周波数/Freq. 50Hz  
 適用比重/S.G. =<1.1

吐出量 FLOW	全揚程 TOTAL HEAD	水馬力 WATER POWER	ポンプ効率 PUMP EFF.	軸動力 SHAFT POWER	NPSHr
L/min	m	kW	%	kW	m
40	19.0	0.124	13.8	0.90	1.0
150	19.2	0.469	37.9	1.24	1.4
350	17.1	0.976	57.7	1.69	2.0
500	14.4	1.174	60.5	1.94	2.9
600	11.7	1.144	56.4	2.03	3.2

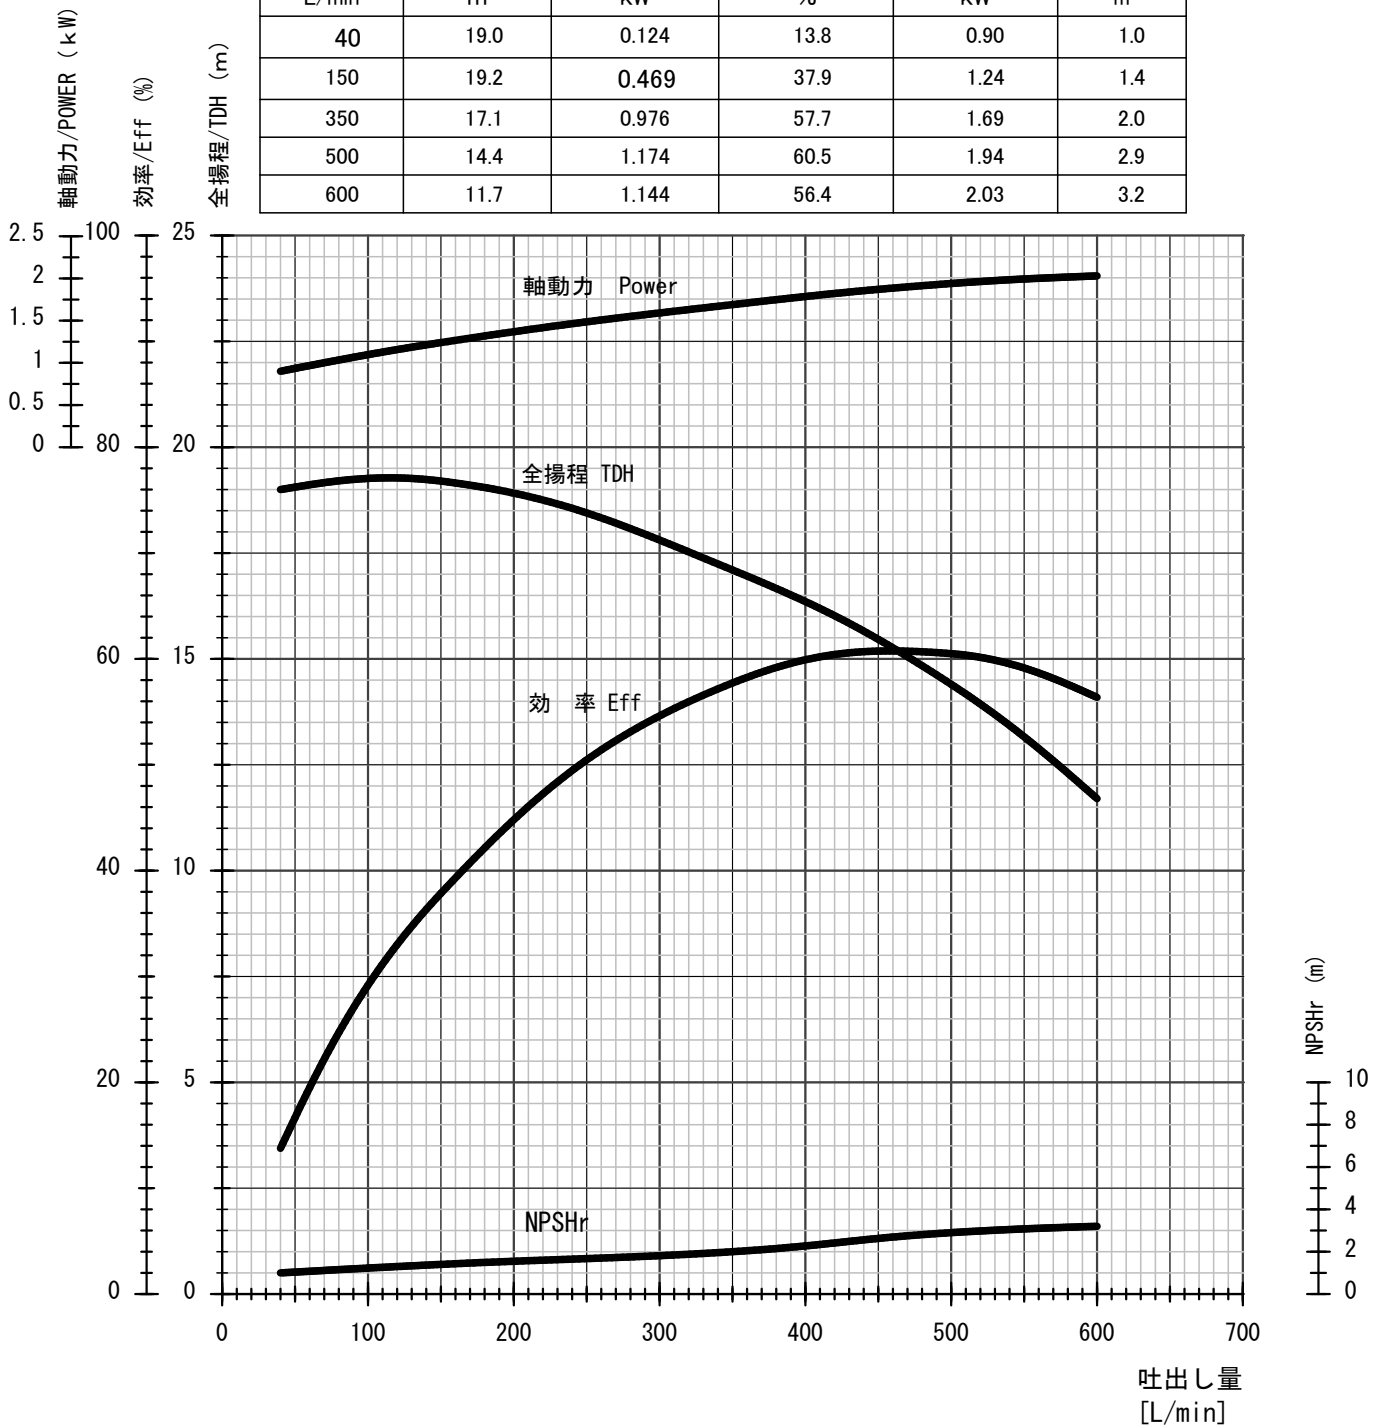


# 予想性能曲線

## PERFORMANCE CURVES

テラダマグネットポンプ  
TOMYENG MAGNET DRIVE PUMP  
型式/MODEL TM-653P/F

No. TMP-261513-000  
モータ/Motor 2.2kW  
周波数/Freq. 50Hz  
適用比重/S.G. =<1.3

吐出量 FLOW	全揚程 TOTAL HEAD	水馬力 WATER POWER	ポンプ効率 PUMP EFF.	軸動力 SHAFT POWER	NPSHr
L/min	m	kW	%	kW	m
40	16.0	0.104	14.9	0.70	1.0
150	16.2	0.396	37.7	1.05	1.4
350	14.5	0.827	59.1	1.40	2.0
500	11.0	0.896	54.3	1.65	2.9
550	9.0	0.807	47.5	1.70	3.0

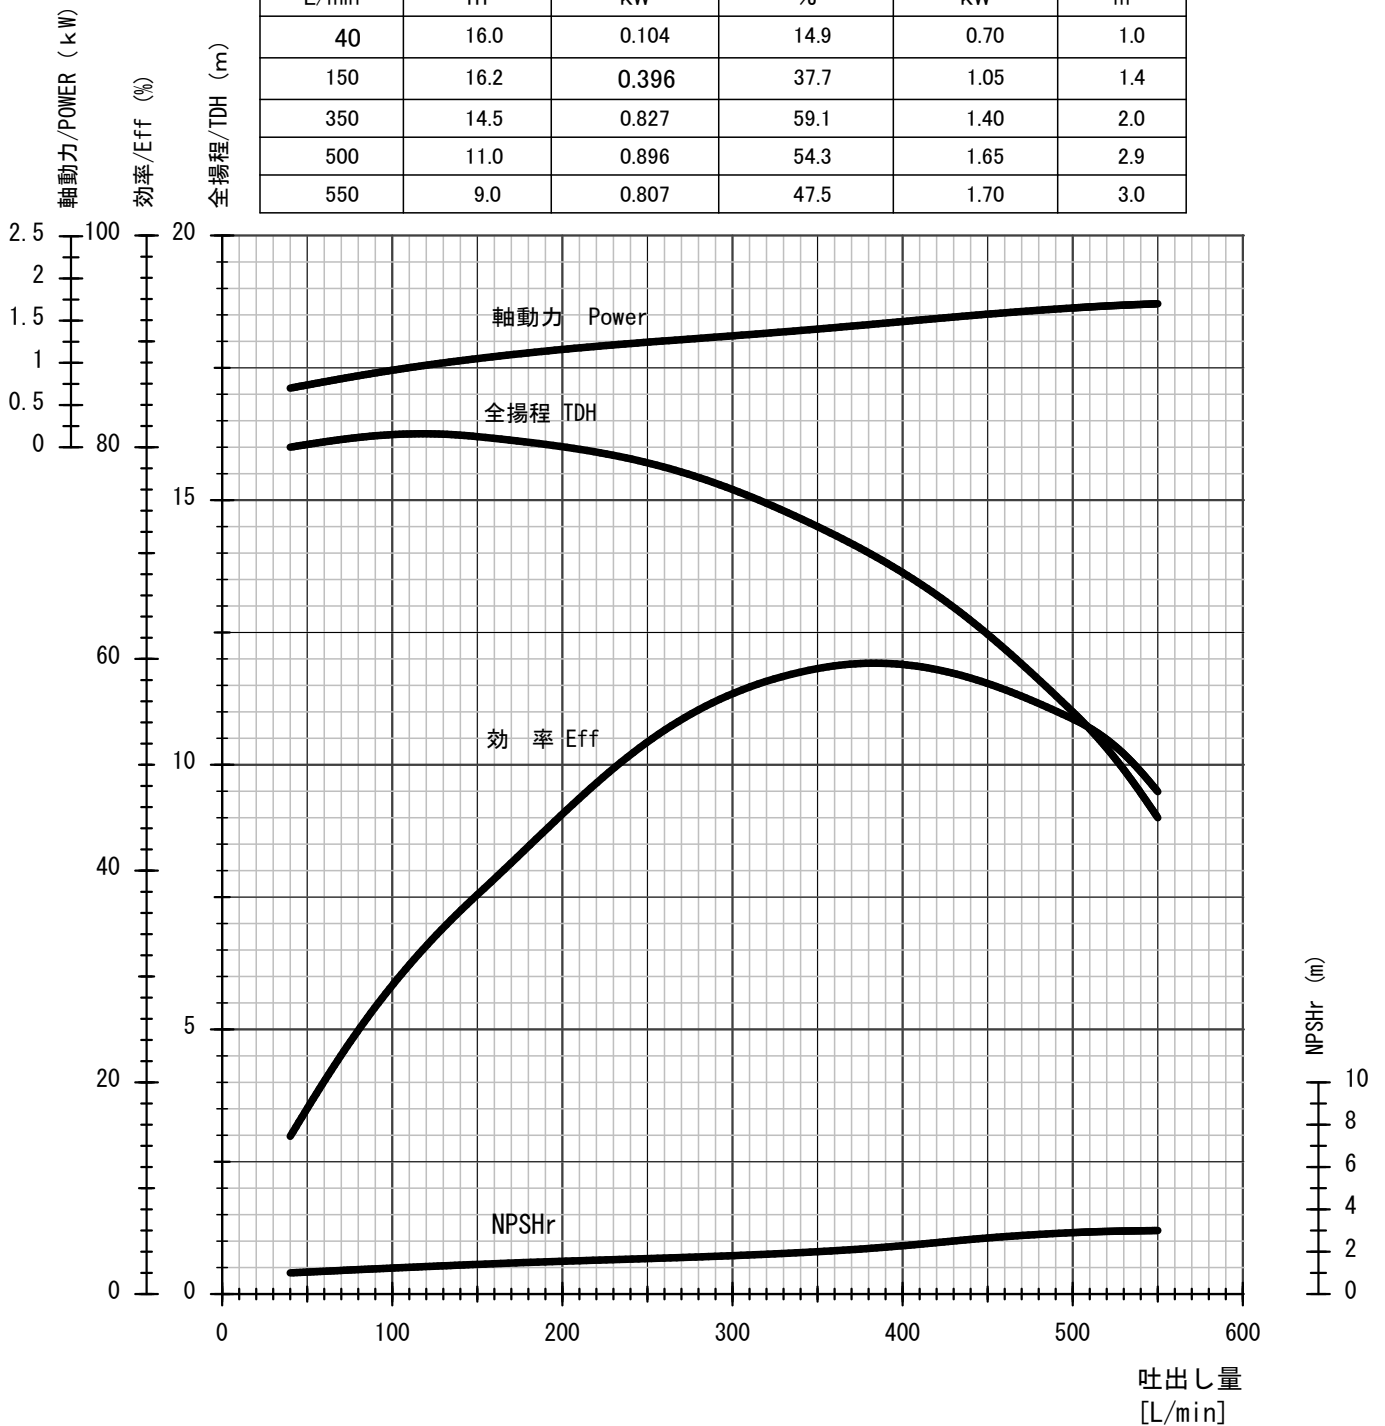

# 予想性能曲線

## PERFORMANCE CURVES

テラダマグネットポンプ  
 TERADA MAGNET DRIVE PUMP  
 型式/MODEL TM-653P/F

No. TMP-261515-000  
 モーター/Motor 2.2kW  
 周波数/Freq. 50Hz  
 適用比重/S.G. <1.5

吐出量 FLOW	全揚程 TOTAL HEAD	水馬力 WATER POWER	ポンプ効率 PUMP EFF.	軸動力 SHAFT POWER	NPSHr
L/min	m	kW	%	kW	m
40	12.7	0.083	12.2	0.68	1.0
150	13.0	0.318	31.5	1.01	1.4
300	12.0	0.587	45.1	1.30	2.0
400	10.5	0.685	48.6	1.41	2.5
550	6.0	0.538	36.6	1.47	3.0

